




# SAEZ

CRANES



# TL 452 4T

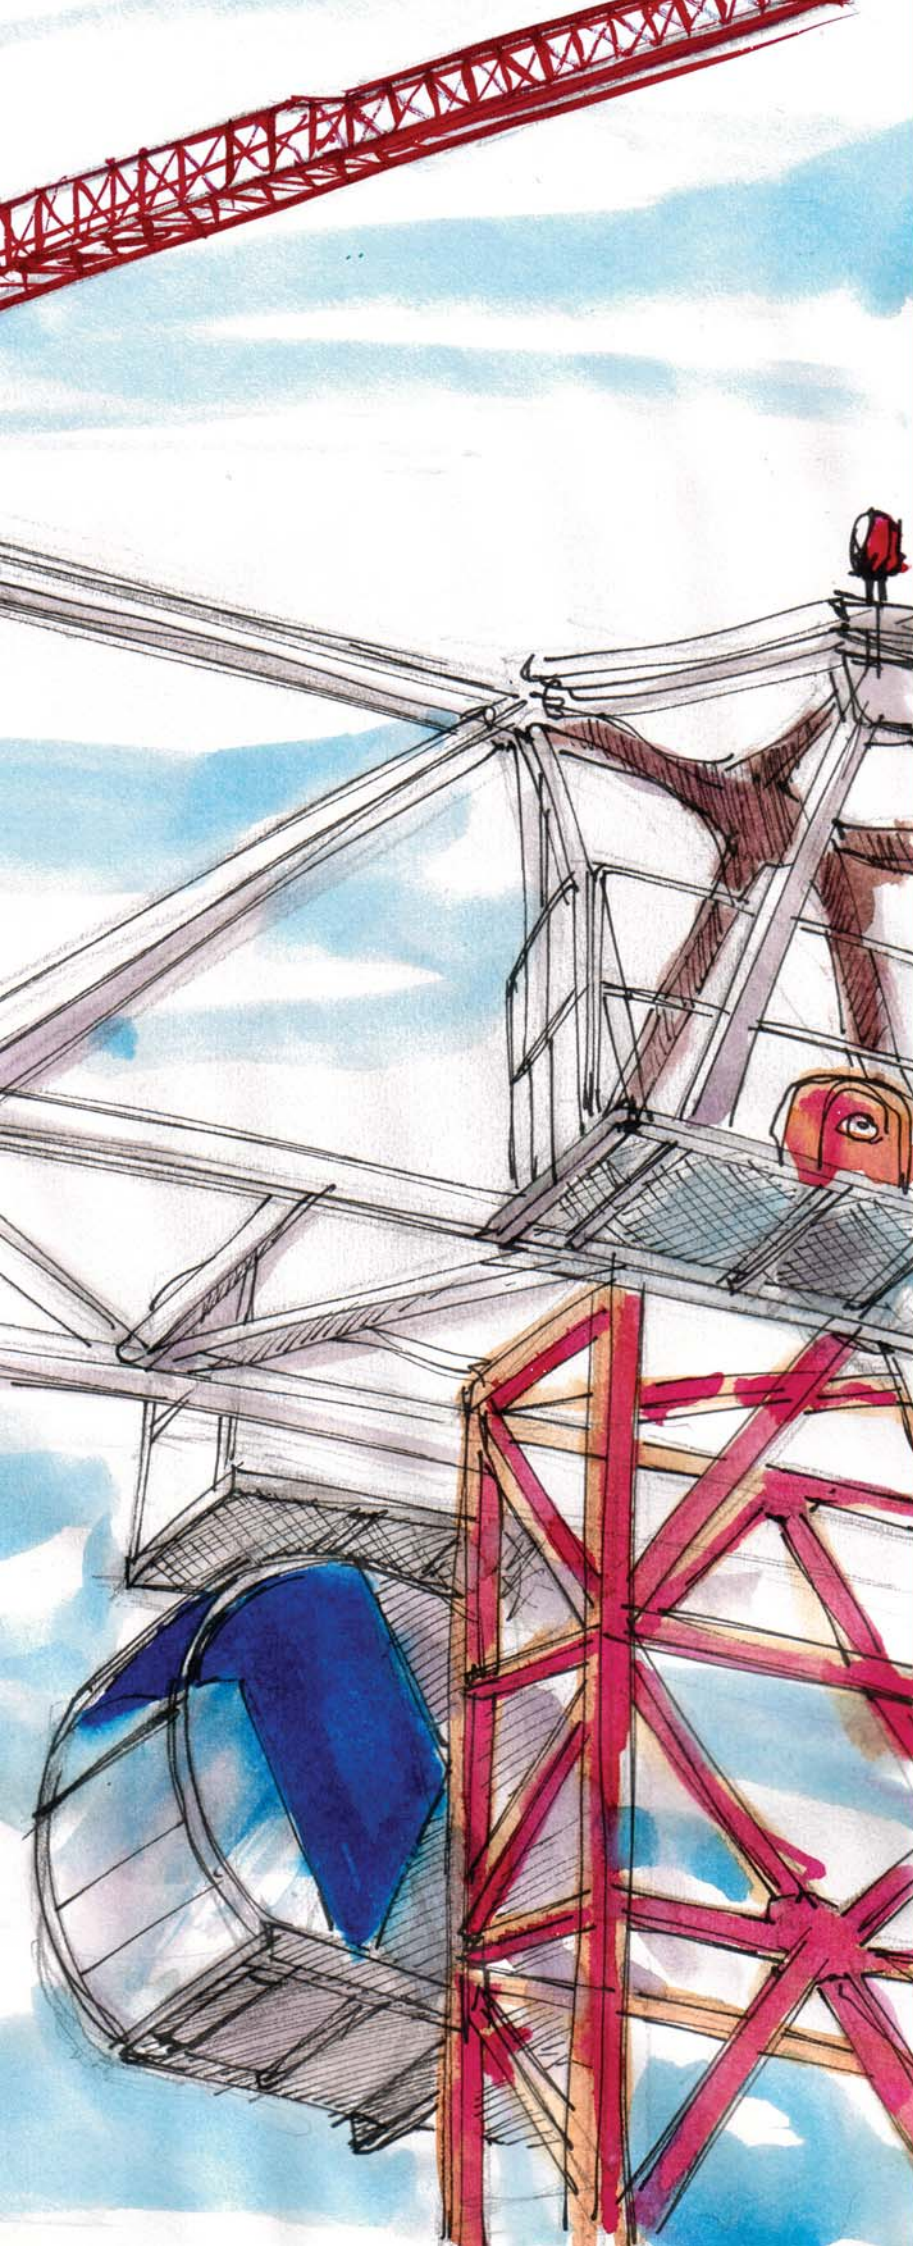

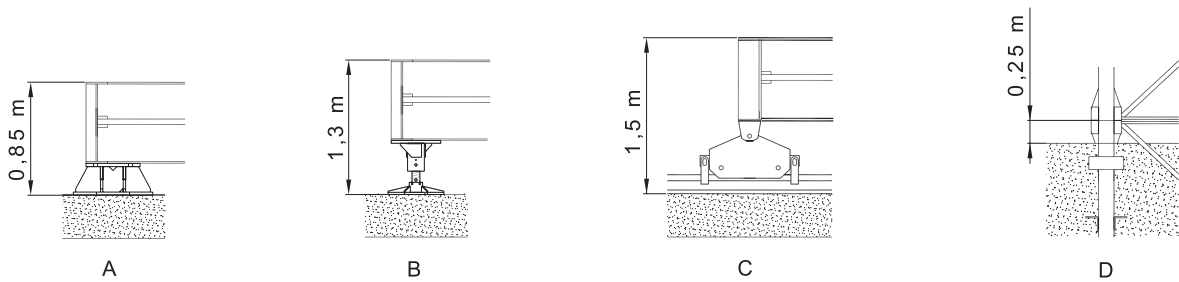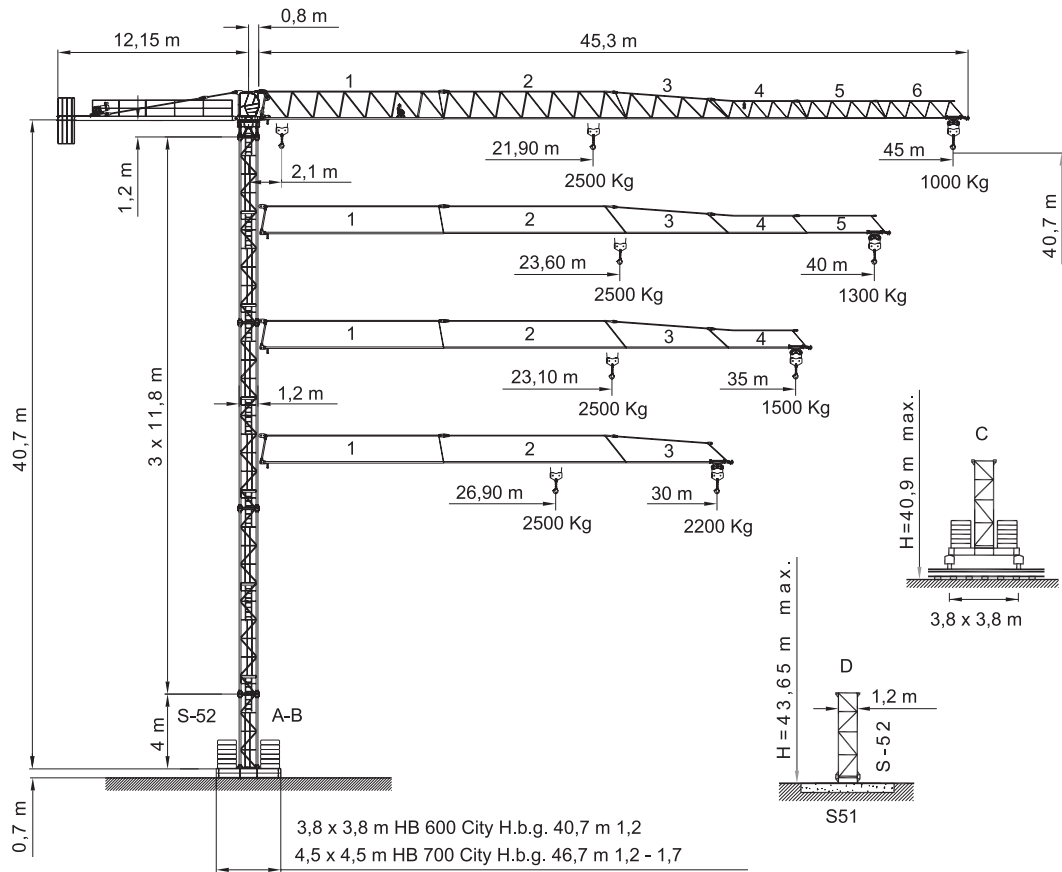

Curvas de cargas  
Load diagrams  
Lastkurven  
Courbes de charges  
Curve di carico

45 m	12	16	18	20	21,9	24	25	26	28	30	33	35	37	39	40	43	45	m	
	2500	2500	2500	2500	2500	2244	2136	2036	1859	1706	1512	1402	1303	1215	1175	1065	1000	Kg	
	9	10	12	13,8	14	16	18	21	24	27	30	33	35	38	40	43	45	m	
4000	4000	4000	4000	3961	3377	2929	2424	2049	1760	1530	1343	1237	1099	1019	912	850	Kg		
40 m	12	16	18	20	23,6	24	25	26	28	30	33	35	37	39	40	m			
	2500	2500	2500	2500	2500	2455	2338	2230	2038	1873	1664	1544	1438	1343	1300	Kg			
	9	10	12	14	15	16	18	21	24	27	30	33	35	38	40	m			
4000	4000	4000	4000	4000	3715	3228	2678	2270	1956	1706	1503	1387	1237	1150	Kg				
35 m	12	16	18	20	23,1	24	25	26	28	30	33	35	m						
	2500	2500	2500	2500	2500	2389	2274	2169	1982	1821	1616	1500	Kg						
	9	10	12	14	14,7	16	18	21	24	27	30	33	35		m				
4000	4000	4000	4000	4000	3631	3153	2614	2215	1907	1662	1463	1350	Kg						
30 m	12	16	18	20	24	25	26	26,9	28	30	m								
	2500	2500	2500	2500	2500	2500	2500	2500	2389	2200	Kg								
	9	10	12	14	16	17,2	18	21	24	27	30		m						
4000	4000	4000	4000	4000	4000	3811	3175	2703	2339	2050	Kg								

**Bloque de contrapeso**  
**Counterweight blocks**  
**Gegengewichtsblöcke**  
**Bloc de contrepoid**  
**Blocco di contrappeso**

**Mecanismos**  
**Mechanisms**  
**Antriebe**  
**Mécanismes**  
**Meccanismi**

	45 m		40 m		35 m			30 m	
	A	B	A	B	A	B	C	A	B
	3	1	2	2	2	1	1	2	1
	8300 Kg		7400 Kg		6850 Kg			6000 Kg	


15 Hp (11,5 Kw) 3V  
 H.B.G. 84 S/R Ø10mm

	240 m	m/min	8	29	58	4	15	30
		Kg	2500	2500	1000	4000	4000	2500
		Kw	11,5	11,5	11,5	11,5	11,5	11,5
		m/min	30 / 60			30 / 60		
		Kw	1,1 / 1,8			1,1 / 1,8		
		r.p.m	0,3	0,6	0,9	0,3	0,6	0,9
		Nm	1 x 65			1 x 65		
		m/min	20			20		
		Kw	2 x 2,2			2 x 2,2		

- \* Opcional / Optional / Opzionale /
- Elevación / Hoisting / Heben / Levage / Sollevamento
- Distribución / Trolleying / Katzfahren / Distribution / Distribuzione
- Orientación / Slewing / Schwenken / Orientation / Rotazione
- Traslacion / Travelling / Schienenfahren / Translation / Traslazione

	25 m	50 m	100 m
15 Hp (11,5 KW) 3V	4 x 16 mm <sup>2</sup>	4 x 16 mm <sup>2</sup>	4 x 25 mm <sup>2</sup>

	400 V 50 Hz	* 380 V 60 Hz	15 Hp (11,5Kw) 3V 24KW / 90 kVA
--	----------------	------------------	------------------------------------

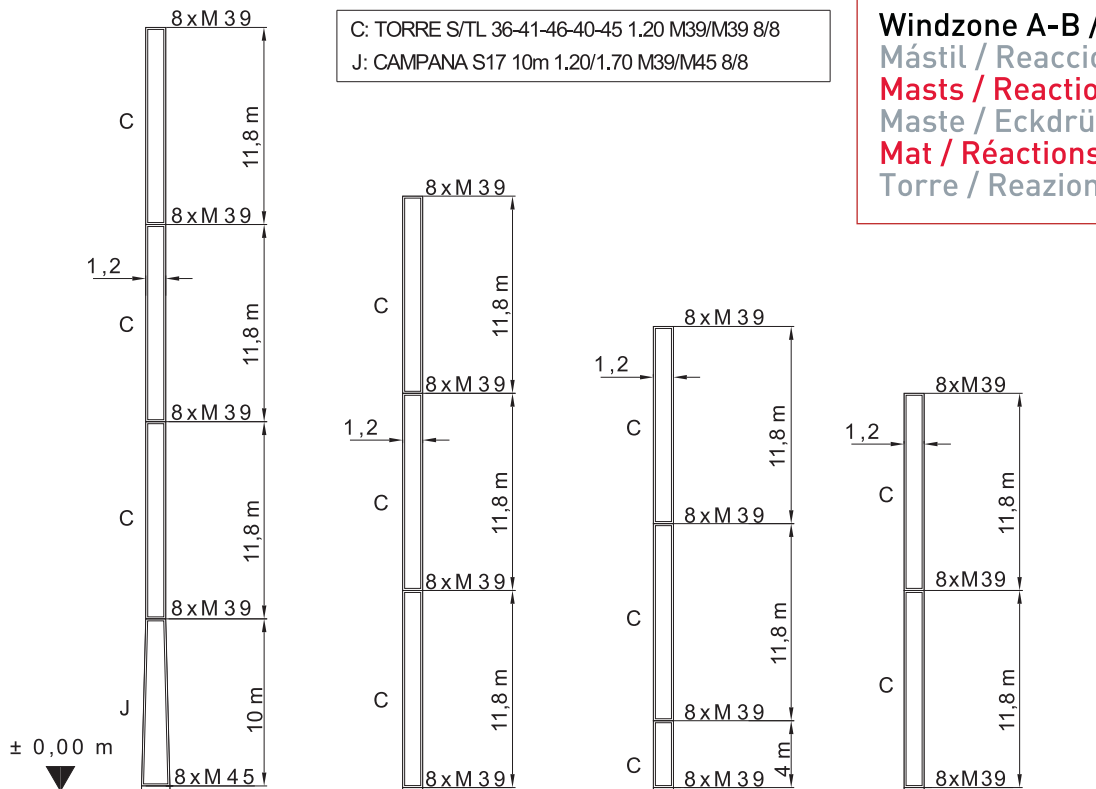


C: TORRE S/TL 36-41-46-40-45 1.20 M39/M39 8/8  
 J: CAMPANA S17 10m 1.20/1.70 M39/M45 8/8

**Windzone A-B / DIN 15019**  
**Mástil / Reacciones**  
**Masts / Reactions**  
**Maste / Eckdrücke**  
**Mat / Réactions**  
**Torre / Reazioni**

S60/8	S51	S51	S51
H: 45.7m	H: 35.65m	H: 27.85m	H: 23.85m
P(t): 45.96	P(t): 38.6	P(t): 32.94	P(t): 30.9
T(t): 7.81	T(t): 6.74	T(t): 5.58	T(t): 4.98
M(t-m): 241.7	M(t-m): 179	M(t-m): 135.7	M(t-m): 116.36

Windzone A-B / DIN 15019  
 Mástil / Reacciones  
 Masts / Reactions  
 Maste / Eckdrücke  
 Mat / Réactions  
 Torre / Reazioni


C: TORRE S/TL 36-41-46-40-45 1.20 M39/M39 8/8  
 D: TORRE S/TL 50-52 1.20 M39/M39 8/8  
 E: TORRE TL 55 1.20 M39/M39 8/8  
 J: CAMPANA S17 10m 1.20/1.70 M39/M45 8/8  
 K: TORRE S17 1.70 M45 8/8  
 L: TORRE S17 1.70 M45 16/8

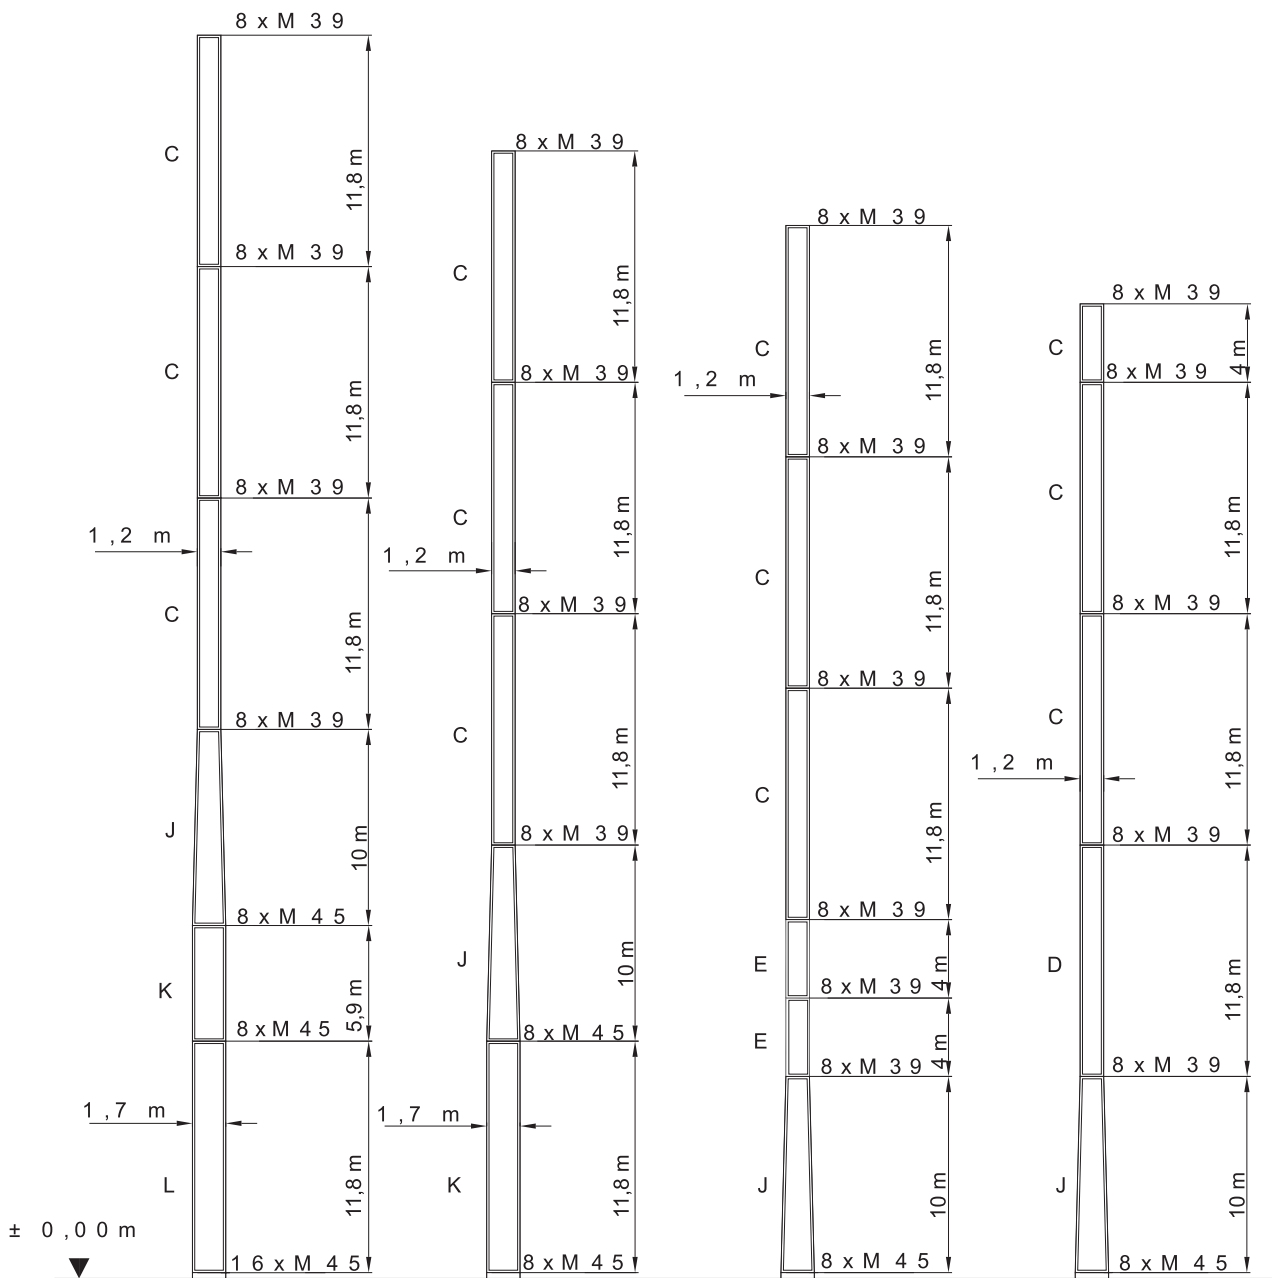

S 6 0 R / 1 6	S 6 0 / 8	S 6 0 / 8	S 6 0 / 8
H : 6 3 , 4 m	H : 5 7 , 5 m	H : 5 3 , 7 m	H : 4 9 , 7 m
P ( t ) : 5 6 , 4 3	P ( t ) : 5 4	P ( t ) : 4 7 , 4 5	P ( t ) : 4 7 , 3 1
T ( t ) : 1 2 , 7 6	T ( t ) : 1 1 , 6 5	T ( t ) : 9	T ( t ) : 8 , 4 1

C:TORRE S/TL 36-41-46-40-45 1.20 M39/M39 8/8
D:TORRE S/TL 50-52 1.20 M39/M39 8/8
J:CAMPANA S17 10m 1.20/1.70 M39/M45 8/8


\* EN SERVICIO / IN SERVICE  
 \*\* FUERA DE SERVICIO / OUT OF SERVICE

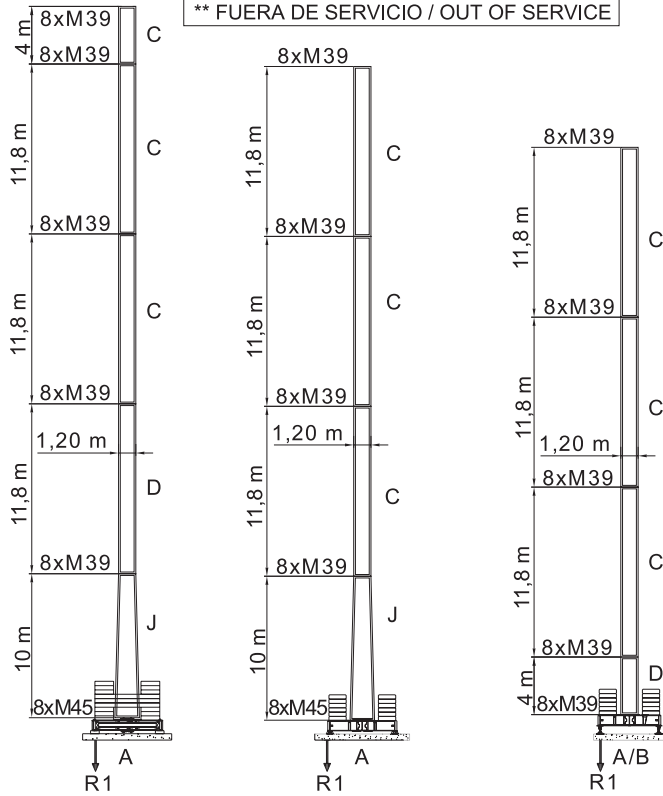

H(m): 50,6	H(m): 46,5	H(m): 40,4
BASE 4,5x4,5 1,7 HM700	BASE 4,5x4,5 1,2/1,7 HB700	BASE 3,8x3,8 1,2 HB600
LASTRE: 121,6 Tn	LASTRE: 98,8 Tn	LASTRE: 76 Tn
	*R1= 62,5 Tn	*R1= 56,3 Tn
**R1= 97 Tn	**R1= 70,9 Tn	**R1= 62,3 Tn

C:TORRE S/TL 36-41-46-40-45 1.20 M39/M39 8/8





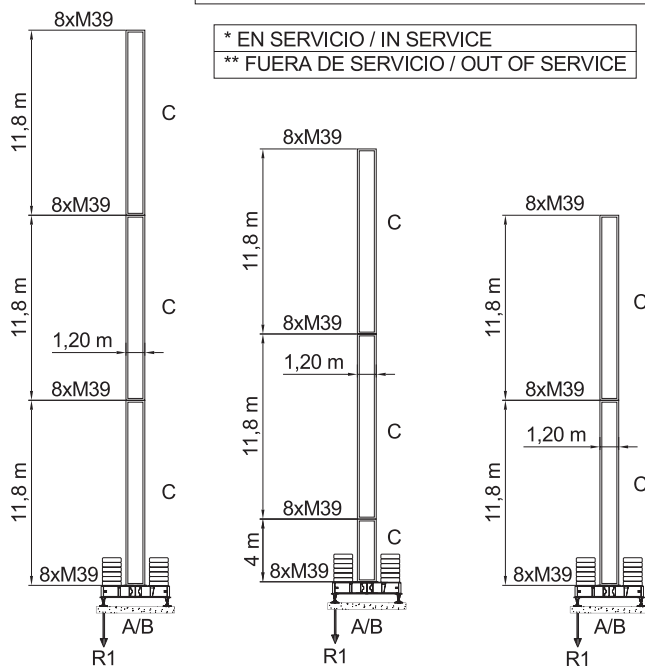






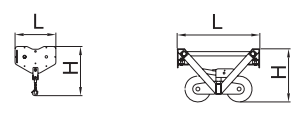



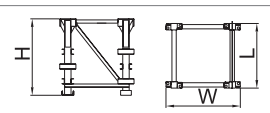
\* EN SERVICIO / IN SERVICE  
 \*\* FUERA DE SERVICIO / OUT OF SERVICE



H(m): 36,4	H(m): 28,6	H(m): 24,6
BASE 3,8x3,8 1,2 HB600	BASE 3,8x3,8 1,2 HB600	BASE 3,8x3,8 1,2 HB600
LASTRE: 76 Tn	LASTRE: 45,6 Tn	LASTRE: 45,6 Tn
*R1= 52 Tn	*R1= 39,3 Tn	*R1= 35,3 Tn
**R1= 54,4 Tn	**R1= 36 Tn	**R1= 29,2 Tn

### Windzone A-B / DIN 15019

Bloque lastre de base  
 Base ballast block  
 Grundballastblöcke  
 Bloc de lest de base  
 Blocco di zavorra alla base

		L(m)	W(m)	H(m)	Peso(Kg)	
<b>Pluma tramo primero</b> / Jib heel section Ausleger-Anlenkstück / Pied de flèche Settore articolato di braccio		1	11,74	1	1,7	1544
<b>Elemento intermedio de pluma</b> / Intermediate jib section / Ausleger-Zwischenstück Elément interm. de flèche / Spezzone di braccio		2	11,74	1	1,7	1064
		3	6,5	1	1,31	502
		4	5	1	1,16	312
		5	5	1	1,16	262
		6	5	1	1,16	206
	<b>Contrapluma</b> /Counter-jib Gegenausleger / Contre-flèche Controbraccio		11,49	0,28	1,65	1502
		4,05	0,30	0,58	96	
<b>Elemento de torre</b> / Tower section Turmstück / Elcment de mât Elemento di torre		C	11,8	1,2	1,38	2520
		C	8,0	1,2	1,38	1870
		C	5,9	1,2	1,38	1348
		C	4,0	1,2	1,38	1050
		D	11,8	1,2	1,38	3017
		D	8,0	1,2	1,38	2075
		D	5,9	1,2	1,38	1560
		D	4,0	1,2	1,38	1100
		E	11,8	1,2	1,38	3782
		E	8,0	1,2	1,38	2654
		E	5,9	1,2	1,38	2090
		E	4,0	1,2	1,38	1527
		J	10	1,85	1,38	3520
		K	11,8	1,85	1,85	4600
		K	5,9	1,85	1,85	2472
K	3	1,85	1,85	1425		
L	11,8	1,85	1,85	5520		
<b>Bloque de contrapeso</b> / Counterweight blocks Gegengewichtsblöcke / Bloc de contrepoids Blocco di contrappeso		A	2,94	0,30	1,25	2300
		B	2,94	0,18	1,25	1400
		C	1,70	0,18	1,25	850
<b>Bloque lastre de base</b> / Base ballast block Grundballastblöcke / Bloc de lest de base Blocco di zavorra alla base		4,4	1,2	0,3	3800	
<b>Gancho y Carro</b> / Hook and Trolley Lasthaken - Laufkatze / Crochet - Chariot Gancio e Carrello		0,75	0,12	1,40	164	
		0,96	1,10	0,62	184	
<b>Cabeza de torre</b> / Tower head Turmspitze / Porte - flèche Testa di torre		2,94	1,8	1,7	2998	
<b>Viga principal base</b> / Main base beam Hauptträger für fundamentkreuz Poutre de châssis de base Trave principale della base		5,72	0,67	0,65	1570	
<b>Semiviga secundaria base</b> / Half base beam Halbträger für fundamentkreuz Semipoutre de châssis de base Semitrave secundaria della base		2,77	0,45	0,665	800	
<b>Elemento de empotre</b> / Foundation anchor Fundamentanker / Élément de scellement El anegare		S51	1,2	1,38	1,42	496
		S60/8	1,85	1,85	1,6	956
		S60R/16	1,85	1,85	1,6	1108

**ESPECIFICACIONES SUJETAS A MODIFICACIONES SIN PREVIO AVISO.**

Specifications subject to modification without notice.  
Obiges kann ohne berstaendigung geaendert werden.  
Specifications susceptibles de modification sans avis préalable.  
Specifiche suscettibili di variazioni senza preavviso.

**DECLINAMOS TODA RESPONSABILIDAD DERIVADA DE LA INFORMACION PROPORCIONADA.**

This information is supplied without liability.  
Sämtliche Angaben erfolgen ohne Gewähr.  
Ces renseignements sont sans garantie.  
Le indicazioni contenute si intendono salvo errori ed omissioni.



**DIN/FEM**   
**UNE 58-101-92 FEM 1001-87**  
According to EC 98/37 instruction


Windzone A-B / DIN 15019  
Viento max. fuerza de servicio 150km/h  
Maximun wind speed out of service 150 km/h  
Maximale windstärke, ohne Betrieb 150 km/h  
Vent maximum, hors service 150 km/h  
Vento max, fuori di servizio 150 km/h





# SAEZ

CRANES

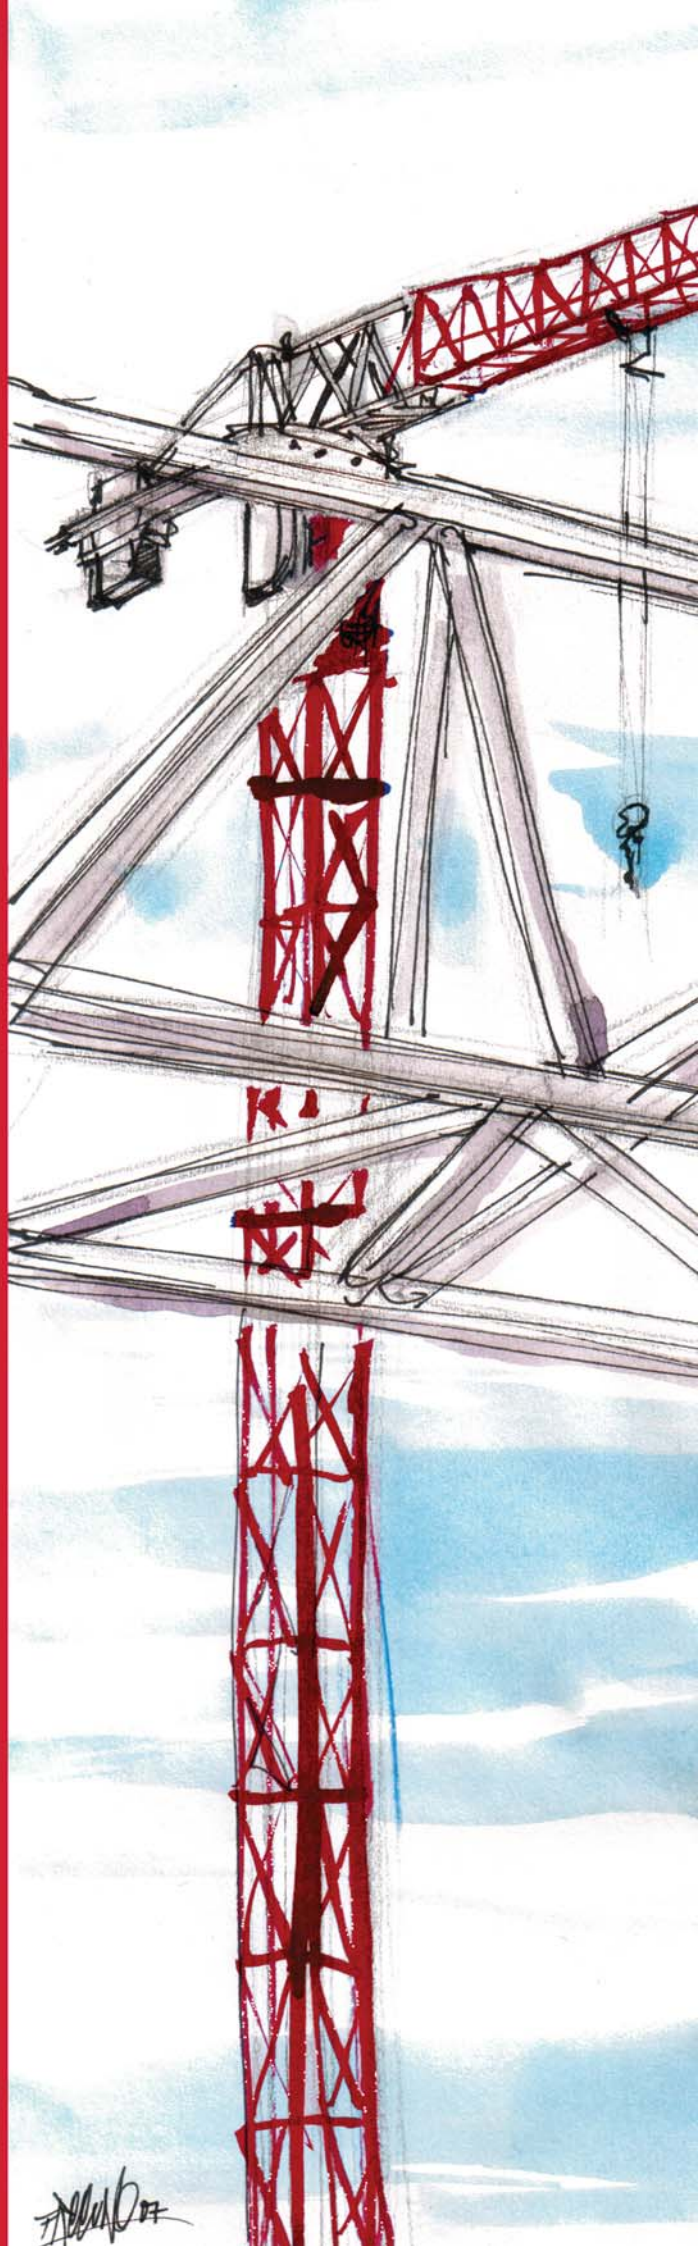

SAEZ Cranes. Autovía Murcia - San Javier. 30155  
Baños y Mendigo . Murcia. Spain  
T + 34 968 60 66 00 F + 34 968 60 66 08  
saezcranes.com

*Handwritten signature*